

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

614.1907

First Named Inventor or Application Identifier:

Kazuhiro TOMIZAWA

Express Mail Label No.

 614.1907  
 U.S. PTO  
 09/122740

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract ..... [ Total Pages: 33 ]
3. ☒ Drawing(s) (35 USC 113) ..... [ Total Sheets: 18 ]
4. ☒ Oath or Declaration ..... [ Total Pages: 3 ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

## 17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:          /         

## 18. CORRESPONDENCE ADDRESS

STAAS & HALSEY  
Attn: H. J. Staas  
700 Eleventh Street, N.W., Suite 500  
Washington, DC 20001

Telephone: (202) 434-1500  
Facsimile: (202) 434-1501

<b>NEW APPLICATION FEE TRANSMITTAL</b>		Attorney Docket No.	614.1907
		Application Number	
		Filing Date	July 27, 1998
AMOUNT ENCLOSED	\$ 912.00	First Named Inventor	Kazuhiro TOMIZAWA

**FEE CALCULATION** (fees effective 10/01/97)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	17 - 20 =	0	X \$ 22.00 =	\$ 0.00
	INDEPENDENT CLAIMS	4 - 3 =	1	X \$ 82.00 =	82.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$270.00 =	0.00
				<b>BASIC FILING FEE</b>	+ 790.00
				Total of above Calculations =	\$ 872.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+ 0.00
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				- 0.00
				<b>TOTAL FILING FEE =</b>	\$ 872.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+ 0.00
	Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))				+ 40.00
				<b>TOTAL FEES DUE =</b>	\$ 912.00

**METHOD OF PAYMENT**

- ☒ Check enclosed as payment.
- ☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
- ☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.


**GENERAL AUTHORIZATION**

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.	19-3935
Deposit Account Name	STAAS & HALSEY

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

**SUBMITTED BY: STAAS & HALSEY**

Typed Name	H. J. Staas	Reg. No.	22,010
Signature		Date	July 27, 1998

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Kazuhiro Tomizawa, a citizen of Japan residing at Maebashi, Gunma, Japan have invented certain new and useful improvements in

APPLICATION MANAGING METHOD AND INFORMATION PROCESSING  
APPARATUS USING THE METHOD

of which the following is a specification : -

1     TITLE OF THE INVENTION

APPLICATION MANAGING METHOD AND INFORMATION  
PROCESSING APPARATUS USING THE METHOD

5     BACKGROUND OF THE INVENTION

          The present invention relates to an  
application managing method, and an information  
processing apparatus using the method, and, in  
particular, to an application managing method, and an  
10    information processing apparatus using the method, used  
when a plurality of applications are stored.

          Recently, card-type recording media having IC  
chips built therein, that is, IC cards, such as  
electronic money, credit cards, cards for self-  
15    governing bodies and so forth, have been used.

          Such an IC card has a large storage capacity,  
and, demands that one card is to be used for a  
plurality of types of business have been increasing.

          For example, in a case where an IC card is  
20    used as a credit card, and an IC card is used as a card  
for a self-governing body, it is convenient for a user  
that a single IC card is used commonly as a credit card  
and as a card for the self-governing body, instead of  
two IC cards for respective uses being possessed.  
25    Therefore, an IC card in which a plurality of  
applications are used is needed.

2.    Descriptions of the Related Art

          In the related art, an operation parameter is  
30    stored in an IC card, and an operation of a host  
computer is changed as a result of the operation  
parameter being supplied to the host computer, which  
parameter is stored in the IC card, when the IC card is  
inserted into a IC card reader/writer. Such a method  
35    is disclosed in Japanese Laid-Open Patent Application  
No.01-029051.

          Further, as a method in which a single IC

1 card is used for a plurality of applications, a method  
for effectively using a program as a result of an  
already-existing program being used when a program is  
added, is disclosed in Japanese Laid-Open Patent  
5 Application No.01-031285. Further, a method, in which  
operation keys are provided on an IC card, and one of a  
plurality of applications is selected as a result of a  
respective one of the operation keys being operated, is  
disclosed in Japanese Laid-Open Patent Application  
10 No.04-255089.

However, in Japanese Laid-Open Patent  
Application No.01-031285, a method of executing the  
stored program is not disclosed.

Further, in the method disclosed in Japanese  
15 Laid-Open Patent Application No.04-255089, the key  
operation needed for selecting one of the plurality of  
applications is troublesome.

#### SUMMARY OF THE INVENTION

20 The present invention has been devised in  
consideration of the above-mentioned points, and an  
object of the present invention is to provide an  
application managing method and an information  
processing apparatus using the method, through which a  
25 desired application of a plurality of applications can  
be easily accessed.

An application managing method, according to  
the present invention, for a case where a plurality of  
applications are stored, comprises the steps of:

30 forming a directory structure corresponding  
to the plurality of applications;

giving items of identification information to  
predetermined directories of the directory structure,  
respectively, the items of identification information  
35 being used for identifying the plurality of  
applications, respectively, the plurality of  
applications corresponding to the predetermined

1     directories, respectively; and  
       performing management so that an application  
       of the plurality of applications corresponding to a  
       directory of the predetermined directories is selected  
5     in accordance with an item of the items of  
       identification information given to the directory of  
       the predetermined directories, when the directory of  
       the predetermined directories is selected.

       In the above-described method, when a  
10    directory is selected, the corresponding application  
       can be recognized immediately by using the item of  
       identification information given to the selected  
       directory.

       The items of identification information may  
15    comprise addresses of the plurality of applications,  
       respectively; and

       an address of the addresses is recognized,  
       and thereby, an application of the plurality of  
       applications corresponding to the address of the  
20    addresses is accessed.

       In this method, it is possible to execute a  
       desired application immediately by recognizing the  
       address of the application given to the selected  
       directory.

25    The application managing method may comprises  
       the steps of:

       preparing an application management table  
       storing the items of identification information and  
       starting addresses of the plurality of applications  
30    which correspond to the items of identification  
       information, respectively; and

       referring to the application management table  
       when a directory of the predetermined directories is  
       selected, so as to recognize a starting address of an  
35    application of the plurality of applications, the  
       starting address corresponding to an item of the  
       identification information given to the directory of

1 the predetermined directories, and to access the  
application of the plurality of applications.

In this method, the application management  
table storing the items of identification information  
5 and starting addresses of the plurality of applications  
which correspond to the items of identification  
information is provided. Therefore, by only changing  
the relationship between the items of identification  
information and the starting addresses of the  
10 applications in the application management table, it is  
possible to perform various functions using the storage  
area which is not large.

The application managing method may comprise  
the steps of:

15 storing size information at a starting  
address of each application of the plurality of  
applications, the size information indicating a size of  
the application of the plurality of applications;  
repeating detection of the size of an  
20 application of the plurality of applications from the  
size information stored in the starting address of the  
application of the plurality of applications, and  
search for a starting address of a next application of  
the plurality of applications in accordance with the  
25 size of the preceding application of the plurality of  
applications, so as to obtain the starting address of a  
desired application of the plurality of applications.

In this method, it is possible to obtain the  
starting address of a desired application using the  
30 order in which the applications are stored. Thereby,  
it is not necessary to prepare the application  
management table, and thus, it is possible to  
effectively use the storage capacity.

An item of the items of identification  
35 information may be given to the highest directory of  
the directory structure.

In this method, it is possible that a single





1 application.

An application managing method, according to another aspect of the present invention, comprises the steps of:

5 storing applications and data used by the applications in a series of storage areas; and  
managing the applications and data used by the applications stored in the series of storage areas, wherein the series of storage areas is  
10 divided into a program area storing the applications and a data area storing the data used by the applications.

In this method, as a result of the series of storage areas being divided into a program area storing  
15 the applications and a data area storing the data used by the applications, the data to be used by the applications is prevented from being destroyed when the applications are updated or increased, and the applications are prevented from being destroyed when  
20 the data used by the applications is updated or increased.

A boundary between the program area and the data area may be changeable.

Thereby, by arbitrarily changing the boundary  
25 between the data area and the program area, appropriate storage capacities of the data area and the program area can be provided in accordance with the amount of the applications and the amount of the data to be used by the applications. Thus, it is possible to  
30 effectively use the storage area.

When the applications are stored in the program area, the applications may be stored from an end of the program area opposite to the boundary.

Thereby, it is possible to change the  
35 boundary without moving the applications in the program area.

An information processing apparatus,

1 according to another aspect of the present invention,  
storing a plurality of applications, comprises a  
directory structure corresponding to the plurality of  
applications,

5 wherein items of identification information  
are given to predetermined directories of the directory  
structure, respectively, the items of identification  
information being used for identifying the plurality of  
10 applications corresponding to the predetermined  
directories of the directory structure.

In the above-described arrangement, it is  
possible to rapidly start execution of an application  
as a result of the application being immediately  
15 recognized from the item of identification information  
given a directory corresponding to the application,  
when the directory is selected.

The items of identification information may  
comprise addresses of the plurality of applications,  
20 respectively.

Thereby, it is possible to rapidly execute an  
application as a result of the application being  
immediately accessed using the address given to the  
directory.

25 The information processing apparatus may  
comprise an application management table which stores  
the items of identification information and starting  
addresses of the plurality of applications which  
correspond to the items of identification information,  
30 respectively.

Thereby, only by changing the relationship  
between the items of identification information and the  
starting addresses of the applications in the  
application management table, it is possible to perform  
35 various functions using the storage area which is not  
so large.

An item of the items of identification

1 information may be given to the highest directory of  
the directory structure.

In this arrangement, it is possible that a  
single application is easily caused to correspond to a  
5 plurality of subordinate directories by giving the item  
of identification information, for identifying the  
application, to the highest directory of directories  
which are used by the application.

An item of the items of identification  
10 information may be given to each directory of the  
directory structure.

Thereby, it is possible to immediately  
execute an application as a result of the application  
being recognized from the item of identification  
15 information given to any one of directories  
corresponding to the application.

An information processing apparatus,  
according to another aspect of the present invention,  
stores applications and data used by the applications  
20 in a series of storage areas,

wherein the series of storage areas is  
divided into two predetermined areas, one of the two  
predetermined areas storing the applications and the  
other of the two predetermined areas storing the data  
25 used by the applications.

In this arrangement, as a result of the  
series of storage areas being divided into a program  
area storing the applications and a data area storing  
the data used by the applications, the data to be used  
30 by the applications is prevented from being destroyed  
when the applications are updated or increased, and the  
applications are prevented from being destroyed when  
the data used by the applications is updated or  
increased.

35 Other objects and further features of the  
present invention will become more apparent from the  
following detailed description when read in conjunction

1 with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

5 FIG.1 shows a system arrangement of a first embodiment of the present invention;

FIG.2 shows a general arrangement of an IC card in the first embodiment of the present invention;

FIG.3 shows a block diagram of the IC card in the first embodiment of the present invention;

10 FIG.4 shows a file arrangement of an EEPROM in the first embodiment of the present invention;

FIG.5 shows separation of a storage area of the EEPROM in the first embodiment of the present invention;

15 FIG.6 shows a method for storing data and applications in the EEPROM in the first embodiment of the present invention;

FIG.7 shows a file structure in the first embodiment of the present invention;

20 FIG.8 shows a processing flowchart for accessing an application in the IC card in the first embodiment of the present invention;

FIG.9 shows a file structure in a variant embodiment of the first embodiment of the present invention;

25 FIG.10 shows a file structure in another variant embodiment of the first embodiment of the present invention;

FIG.11 shows a file arrangement of an EEPROM in a second embodiment of the present invention;

FIG.12 shows a data arrangement of an application management table in the second embodiment of the present invention;

35 FIG.13 shows a file structure in the second embodiment of the present invention;

FIG.14 shows a processing flowchart for accessing an application in an IC card in the second

1 embodiment of the present invention;

FIGS.15, 16 and 17 illustrate operations for updating an application in the second embodiment; and

5 FIG.18 illustrates operations for accessing an application in the third embodiment.

#### DETAILED DESCRIPTIONS OF THE PREFERRED EMBODIMENTS

FIG.1 shows a system arrangement of a first embodiment of the present invention.

10 In this embodiment, a plurality of applications are stored in a single IC card in a system using the IC card, and, thereby, the IC card is used for a plurality of services.

The system 1 in this embodiment includes an  
15 IC card reader/writer 3 acting as an interface with the IC card 2, and a host computer 4 connected with the IC card reader/writer 3 and performing information processing in accordance with the applications stored in the IC card 2.

20 As the IC card 2, for example, a contact-type IC card or a non-contact-type IC card is used. A case where the contact-type IC card is used as the IC card 2 will now be described.

In the case where the contact-type IC card is  
25 used, electrical connection is performed as a result of contacts of the IC card coming into contact with connection terminals. When the IC card 2 is inserted into a predetermined insertion portion 5 of the IC card reader/writer 3, the contacts 6 which are exposed on a  
30 surface of the IC card 2 come into contact with the connection terminals 7 provided in the insertion portion 5 of the IC card reader/writer 3. As a result of the contacts 6 of the IC card 2 coming into contact with the connection terminals 7 provided in the  
35 insertion portion 5 of the IC card reader/writer 3, the IC card 2 is substantially connected with the host computer 4.

1           In the IC card 2, a necessary application is  
selected from the plurality of applications stored in  
an internal memory of the IC card in accordance with a  
select file command supplied from the host computer 4,  
5           and the selected application is executed,  
automatically.

FIG.2 shows a general arrangement of the IC  
card in the first embodiment of the present invention.

For example, the IC card 2 comprises the  
10          contact-type IC card as shown in FIG.2. An LSI circuit  
60 is embedded in a card body 80 made of resin, and the  
contacts 6 of the LSI circuit 60 are exposed on the  
surface of the card body 80, which contacts 6 of the  
LSI circuit 60 come into contact with the connection  
15          terminals 7 of the IC card reader/writer 3.

FIG.3 shows a block diagram of the IC card 2  
in the first embodiment of the present invention.

The contacts 6 are connected with the LSI  
circuit 60, thereby external connection of the LSI  
20          circuit 60 being performed. The LSI circuit 60  
includes an interface circuit 8 acting as an interface  
with the IC card reader/writer 3 which is connected  
with the LSI circuit 60 through the contacts 6, a CPU 9  
performing data processing, a basic OS necessary for  
25          operating the IC card 2, a ROM 10 storing set values  
and so forth, a RAM 11 acting as a work area when the  
CPU 9 performs data processing, and an EEPROM 12  
storing the plurality of applications which can be  
executed in the IC card 2.

30          FIG.4 shows a file arrangement of the EEPROM  
12 in the first embodiment of the present invention.

Generally, the EEPROM 12 includes a  
management area 13 storing management information for  
managing data and the applications stored in other  
35          storage areas of the EEPROM 12, a data area 14 storing  
data such as a file structure, the files of which are  
used by the applications, and a program area 15 storing

1 the applications.

The starting address, in the program area 15,  
of each application stored in the program area 15 is  
given to the highest directory of directories of the  
5 file structure stored in the data area 14, the files of  
the above-mentioned directories being used by the  
above-mentioned applications.

The program area 15 is completely separated  
from the data area 14, and the boundary of these two  
10 areas is changeable.

FIG.5 illustrates the area separation in the  
EEPROM 12 in the first embodiment of the present  
invention.

With reference to FIG.5, the boundary 'c'  
15 between the data area 14 and the program area 15 is  
managed, as the last address of the data area 14  
'adrDD' or the first address of the program area 15  
'adrDA', in the management area 13.

When files stored in the data area 14 are  
20 updated, control is performed so that the data stored  
in the data area 14 does not exceed the boundary 'c',  
that is, the last address 'adrDD' of the data area 14  
or the first address 'adrDA' of the program area 15 as  
a result of the updating of the files, the information  
25 of the boundary 'c' being managed in the management  
area 13. Similarly, when the applications are updated,  
control is performed so that the applications stored in  
the program area 15 do not exceed the boundary 'c',  
that is, the last address 'adrDD' of the data area 14  
30 or the first address 'adrDA' of the program area 15 as  
a result of the updating of the applications, the  
information of the boundary 'c' being managed in the  
management area 13.

As a result of the data stored in the data  
35 area 14 and the applications stored in the program area  
15 being managed by using the boundary 'c', the data  
stored in the data area 14 is prevented from being

1 destroyed by the applications when the updating of the  
applications or the like is performed, and, similarly,  
the applications stored in the program area 15 are  
prevented from being destroyed by the files when the  
5 updating of the files or the like is performed.

Further, because the information of the  
boundary 'c' is managed by using the address set in the  
management area 13, the position of the boundary 'c'  
can be easily changed as a result of the address  
10 managed in the management area 13 being changed.

Thereby, for example, in a case where a  
storage capacity of the program area 15 is insufficient  
while the data area 14 has storage capacity to spare,  
the necessary storage capacity can be provided for the  
15 program area 15 as a result of only the address, which  
determines the boundary 'c', managed in the management  
area 13 being changed to the side of the data area 14.

Similarly, in a case where a storage capacity  
of the data area 14 is insufficient while the program  
20 area 15 has storage capacity to spare, the necessary  
storage capacity can be provided for the data area 14  
as a result of only the address, which determines the  
boundary 'c', managed in the management area 13 being  
changed to the side of the program area 15.

25 Further, in the first embodiment, as shown in  
FIG.6, the data, 'data 1', 'data2', ..., 'data m', is  
stored in the data area 14 from the lower address of  
the EEPROM 12 in the order of the addresses, while the  
applications, APL1, APL2, ..., APLn, are stored in the  
30 program area 15 from the higher address of the EEPROM  
12 in the order reverse to the order of the addresses.  
Thus, the last data 'data m' of the data area 14 is  
stored before the boundary 'c' while the last  
application APLn stored in the program area 15 is  
35 stored after the boundary 'c'. As a result, the  
boundary 'c' between the data area 14 and the  
application area 15 can be changed without moving the



1 data stored in the data area 14 or the applications  
stored in the program area 15.

Specifically, when the applications are  
stored in the program area 15, first, the application  
5 APL1 is stored from the highest address in the order  
reverse to the order of the addresses. Then, the  
application APL2 is stored from the address immediately  
lower than the address at which the last item of the  
application APL1 has been stored, in the order reverse  
10 to the order of the addresses. Then, similarly, each  
subsequent application is stored from the higher  
address in the order reverse to the order of the  
addresses.

FIG.7 illustrates the file structure stored  
15 in the data area 14 in the first embodiment of the  
present invention.

The file structure in the first embodiment of  
the present invention includes a master directory DLL0,  
and file portions F1 through Fn subordinate to the  
20 master directory DLL0. The file portions F1 through Fn  
include files f1 through files fn, respectively, which  
are used by the applications APL1 through APLn,  
respectively, and highest directories dll1 through  
dlln, and subordinate directories dll11 through  
25 directories dlln1.

The starting addresses adr1 through adrn of  
the applications APL1 through APLn, which addresses  
adr1 through adrn are starting addresses in the program  
areas 15 from which the applications APL1 through APL2  
30 are stored, respectively, are given to the highest  
directories dll1 through dlln of the file portions F1  
through Fn, respectively. The file portions F1 through  
Fn include files f1 through files fn used by the  
applications APL1 through APLn, respectively, as  
35 mentioned above.

FIG.8 shows a processing flowchart for  
accessing an application of the applications stored in

1 the program area 15 in the IC card in the first  
embodiment of the present invention.

When a command is supplied from the host  
computer 4 to the IC card 2 through the IC card  
5 reader/writer 3 (in a step S1-1), the received command  
is analyzed in the IC card 2 (in a step S1-2).

Then, it is determined whether or not the  
received command is the select file command (in a step  
S1-3). When it is determined in the step S1-3 that the  
10 received command is the select file command, a file  
specified by this select file command is selected (in a  
step S1-4).

When the file is selected in the step S1-4,  
the highest directory of the file portion which  
15 includes the selected file is recognized (in a step S1-  
5). Then, the starting address of the application  
given to the highest directory of the file portion is  
recognized, the file portion corresponding to this  
application, that is, the files included in the file  
20 portion being used by the application (in a step S1-6).  
When the starting address of the application is  
recognized in the step S1-6, the application stored at  
the recognized starting address is accessed and a  
command of the application is read from this starting  
25 address and execution of the application is started (in  
a step S1-7).

At this time, although only the starting  
address of the application was given to the highest  
directory of the respective file portion, because the  
30 size of the application is written at this starting  
address, the last address of the application can be  
recognized. As mentioned above, the application is  
stored from a higher address in the order reverse to  
the order of the addresses. Therefore, when the  
35 application is executed, the count value of a program  
counter is decremented successively from the starting  
address.

1           Thus, as mentioned above, the information of  
the size of the application is written at the starting  
address of the application. Thereby, only as a result  
of the starting address of the application being set in  
5 the highest directory of the file portion of the  
selected file, the desired application can be executed.

When it is determined in the step S1-3 that  
the received command is another command, the IC card 2  
performs the processing in accordance with this command  
10 (in a step S1-8).

Thus, in the first embodiment of the present  
invention, as a result of only a file being specified  
by the select file command supplied from the host  
computer 4, the application corresponding to the  
15 specified file is automatically executed.

In the first embodiment of the present  
invention, the starting address of each application is  
given to the highest directory of a respective file  
portion. However, it is also possible that the  
20 starting address of each application be given to a  
subordinate directory or subordinate directories of a  
respective file portion.

FIG.9 illustrates a file structure in a  
variant embodiment of the first embodiment of the  
25 present invention. The same reference symbols are  
given to portions/components the same as those shown in  
FIG.7, and the descriptions thereof will be omitted.

In this variant embodiment, similar to the  
highest directories dll1 through dlln of the respective  
30 file portions F1 through Fn, the starting addresses, in  
the program area 15, of the corresponding applications  
are given to the directories dll11 through directories  
dlln1 subordinate to the highest directories dll1  
through dlln, respectively.

35           In this variant embodiment, the starting  
address of each application can be obtained from any  
one of the directories of a respective file portion.

1 As a result, it is not necessary to select the highest  
directory from the directories of the file portion. As  
a result, execution of the application can be performed  
quickly as a result of the application being accessed  
5 immediately.

In the file structures shown in FIGS.7 and 9,  
the starting addresses of the applications are given to  
the directories of the file portions F1 through Fn,  
respectively. However, it is also possible that the  
10 starting address of an application APL0 is given to the  
master directory DLL0.

FIG.10 illustrates the file structure in  
another variant embodiment of the first embodiment of  
the present invention. The same reference symbols are  
15 given to portions/components the same as those shown in  
FIG.9, and the descriptions thereof will be omitted.

In this other variant embodiment, similar to  
the highest directories dll1 through dlln of the  
respective file portions F1 through Fn, the starting  
20 addresses, in the program area 15, of the corresponding  
applications are given to the directories dll11 through  
directories dlln1 subordinate to the highest  
directories dll1 through dlln, respectively. Further,  
the starting address adr0, of the program area 15, from  
25 which the corresponding application APL0 is stored, is  
given to the master directory DLL0.

In this other variant embodiment, the address  
of each application can be obtained from any one of the  
directories of a respective file portion. As a result,  
30 it is not necessary to select the highest directory  
from the directories of the file portion. As a result,  
execution of the application can be performed quickly  
because recognition of and access to the starting  
address of the application is performed immediately.  
35 Further, as a result of the starting address adr0, of  
the program area 15, from which the application APL0 is  
stored, being given to the master directory DLL0, it is

1 possible that the starting address adr0 of the  
application APL0 which can use files of a plurality of  
file portions in the file structure can be included in  
the program area 15.

5 In the case of this other variant embodiment,  
when the file select command supplied from the host  
computer 4 specifies files of a plurality of file  
portions (ones of F1, F2, ..., Fn), these files of the  
plurality of file portions are selected in the step S1-  
10 4. Then, in this case, the master directory DLL0 is  
recognized in the step S1-5, the starting address adr0  
of the application APL0 is recognized in the step S1-6.  
Then, a command of this application APL0 written at the  
starting address adr0 is read, and the application APL0  
15 is executed (in the step S1-7).

In the case of this other variant embodiment,  
when the file select command supplied from the host  
computer 4 specifies a file(s) of a single file portion  
Fm (m = 1, 2, 3, ..., or n), the file(s) of the single  
20 file portion Fm is (are) selected in the step S1-4.  
Then, in this case, the highest directory dllm, or the  
directory dllm1 or the like subordinate to the highest  
directory is recognized in the step S1-5, the starting  
address adrm of the application APLm is recognized in  
25 the step S1-6. Then, a command of this application  
APLm written at the starting address adrm is read, and  
the application APLm is executed (in the step S1-7).

In the above-described embodiments, the  
starting addresses of the applications are directly  
30 given to the directories of the file portions,  
respectively. However, it is also possible that  
identification numbers of the applications are given to  
the directories, respectively, an application  
management table storing the identification numbers and  
35 the starting addresses of the applications having the  
identification numbers, respectively, is provided, and  
the application management table is referred to so that

1 the starting addresses of the applications can be  
obtained from the identification numbers of the  
applications, respectively, which identification  
5 numbers have been given to the directories,  
respectively.

An embodiment in the case where the  
application management table is provided will now be  
described. The system arrangement of the embodiment  
(second embodiment) is similar to that of the above-  
10 described first embodiment, and, therefore, the  
descriptions thereof will be omitted.

FIG.11 shows a file arrangement of an EEPROM  
20 in the second embodiment of the present invention.

The same reference numerals are given to  
15 portions the same as those shown in FIG.4, and the  
descriptions thereof will be omitted.

In the second embodiment, the application  
management table 21 is provided in the management area  
13 of the EEPROM 20, and the identification numbers of  
20 the applications are given to the directories of the  
file structure 22, respectively, stored in the data  
area 14.

FIG.12 shows a data arrangement of the  
application management table 21 in the second  
25 embodiment of the present invention.

As shown in FIG.12, the application  
management table 21 includes the identification numbers  
#0, #1, #2, ..., #n given to the applications APL0,  
APL1, APL2, ..., APLn stored in the program area 15 of  
30 the EEPROM 20, respectively, and the starting addresses  
adr0, adr1, adr2, ..., adrn, in the program area 15, of  
the applications APL1, APL2, ..., APLn having the  
identification numbers #0, #1, #2, ..., #n,  
respectively.

35 The above-mentioned identification numbers  
#0, #1, #2, ..., #n are given to the directories,  
respectively, which correspond to the applications

1 APL0, APL1, APL2, ..., APLn, respectively.

FIG.13 illustrates a file structure in the second embodiment of the present invention. The same reference symbols are given to portions/components the same as those shown in FIG.10, and the descriptions thereof will be omitted.

The file structure in the second embodiment includes the master directory DLL0, the directories dll1 through dlln subordinate to the master directory DLL0, the directories dll11 through directories dlln1 subordinate to the directories dll1 through dlln, respectively, and the files f1 through files fn, as shown in FIG.13. The identification numbers #0, #1, #2, ..., #n are given to these directories, corresponding to the applications APL0, APL1, APL2, ..., APLn, respectively. The identification numbers #0, #1, #2, ..., #n are used for identifying the applications APL0, APL1, APL2, ..., APLn, respectively.

20 FIG.14 shows a processing flowchart for accessing an application in the IC card in the second embodiment of the present invention.

When a command is supplied from the host computer 4 to the IC card 2 through the IC card reader/writer 3 (in a step S2-1), the received command is analyzed (in a step S2-2).

Then, it is determined whether or not the received command is the select file command (in a step S2-3). When it is determined in the step S2-3 that the received command is the select file command, a file specified by this select file command is selected (in a step S2-4).

When the file is selected in the step S2-4, a directory of the file portion of the selected file is recognized (in a step S2-5). Then, the identification number (one of #1, #2, ..., #n) of the application given to the recognized directory of the file portion

1 is recognized, which file portion corresponds to this  
application (in a step S2-6). When the identification  
number of the application is recognized in the step S2-  
6, the application management table 21 set in the  
5 management area 13 of the EEPROM 20 is referred to (in  
a step S2-7). Thereby, the starting address (one of  
adr1, adr2, ..., adrn), in the program area 15, of the  
application (one of the applications APL1, APL2, ...,  
APLn) corresponding to the identification number (the  
10 one of #1, #2, ..., #n) is obtained (in a step S2-8).

The starting address (the one of adr1,  
adr2, ..., adrn) of the application (the one of the  
applications APL1, APL2, ..., APLn) is accessed, a  
command of this application is read from the accessed  
15 starting address and execution of this application is  
started (in a step S2-9).

When it is determined in the step S2-3 that  
the received command is another command, the processing  
in accordance with this command is performed (in a step  
20 S2-10).

When the file select command supplied from  
the host computer 4 specifies files of a plurality of  
file portions (ones of F1, F2, ..., Fn), these files of  
the plurality of file portions are selected in the step  
25 S2-4. Then, in this case, the master directory DLL0 is  
recognized and the identification number #0 given to  
the master directory DLL0 is recognized in the step S2-  
6. Then the application management table 21 is  
referred to (in the step S2-7) and the starting address  
30 adr0 of the application APL0 is obtained in the step  
S2-8. Then, a command of this application APL0 written  
at the starting address adr0 is read, and the  
application APL0 is executed (in the step S2-9).

When the file select command supplied from  
35 the host computer 4 specifies files of a single file  
portion Fm (m = 1, 2, 3, ..., or n), these files of the  
single file portion are selected in the step S2-4.



1 Then, in this case, the highest directory dllm, or the  
directory dllm1 or the like subordinate to the highest  
directory is recognized, and the identification number  
#m given to the highest directory dllm, or the  
5 directory dllm1 or the like subordinate to the highest  
directory is recognized in the step S2-6. Then, the  
application management table 21 is referred to (in the  
step S2-7) and the starting address adrm of the  
application APLm is obtained in the step S2-8. Then, a  
10 command of this application APLm written at the  
starting address adrm is read, and the application APLm  
is executed (in the step S2-9).

Thus, in the second embodiment of the present  
invention, as a result of only a file (or files) being  
15 specified by the select file command supplied from the  
host computer 4, the application corresponding to the  
specified file(s) is automatically executed.

In the second embodiment, when an application  
is updated, an existing application is left, as it is,  
20 and an updated application is additionally stored in  
the program area 15. Then, the address of the  
application corresponding to the identification number  
of the application to be updated is changed to the  
starting address of an application obtained as a result  
25 of the application to be updated being updated.

FIGS.15, 16 and 17 illustrate operations in  
the second embodiment of the present invention for  
updating an application stored in the program area 15.  
FIG.15 shows states of the program area 15 and the  
30 application management table 21 before an application  
is updated. FIG.16 shows states of the program area 15  
and the application management table 21 after the  
application is updated. FIG.17 shows states of the  
program area 15 and the application management table 21  
35 after the former application is deleted.

As shown in FIG.15, in the case where the  
application APL1 is stored in the program area 15, the

1 identification number #1 for identifying the  
application APL1 and the starting address adr1 of the  
application APL1 are stored in the application  
management table 21.

5 When the application APL1 is updated, as  
shown in FIG.16, the application APL1 is left, as it  
is, and an application APL1' obtained from the  
application APL1 being updated is additionally stored  
in the program area 15.

10 Then, the starting address adr1 of the former  
application APL1 corresponding to the identification  
number #1 is changed to the starting address adr1' of  
the newly stored application APL1', as shown in FIG.16.

15 Thus, the application APL1 corresponding to  
the identification #1 is changed to the application  
APL1' while the former application APL1 is left in the  
program area 15, as it is.

20 Further, in order to efficiently use the  
storage capacity of the program area 15, as shown in  
FIG.17, the former application APL1 may be deleted from  
the program area 15. In this case, the former  
application APL1 is deleted, the newly stored  
application APL1' is moved to the position at which the  
former application APL1 has been stored, and the  
25 starting address for the identification number #1 is  
returned to the former starting address adr1.

Thus, the application APL1 is updated to the  
application APL1'.

30 In the second embodiment, it is possible to  
substantially delete an application from the program  
area 15, only by causing the identification number of  
the application to be substantially deleted to be  
ineffective in a case where the applications are  
managed by using the identification numbers. Thus,  
35 when the applications are managed by using the  
identification numbers, it is possible to simplify the  
process of substantially deleting an application from

1 the program area 15 only by changing the starting  
address of the application to be deleted into an  
ineffective numeral or symbol (for example, a numeral  
which is not included in the addresses of the EEPROM).  
5 Thereby, it is possible to substantially delete an  
unnecessary application from the program area 15  
without actually deleting this application.

In the above-described first embodiment, an  
application is accessed by using the starting address  
10 thereof. In the above-described second embodiment, an  
application is accessed by using the starting address  
thereof which is obtained through the application  
management table 21 from the identification number of  
the application to be executed. An arrangement in  
15 which, without using the management table 21, an  
application is accessed directly by using the  
identification number thereof can be considered.

FIG.18 illustrates operations for executing  
an application in a third embodiment of the present  
20 invention. In the third embodiment, without using the  
management table 21, an application is accessed  
directly by using the identification number thereof.

The third embodiment includes the file  
structure the same as that of the second embodiment  
25 shown in FIG.13. The third embodiment does not  
include the application management table 21.

In the third embodiment, when one of the  
identification numbers #0 through #n is obtained from a  
directory of the directories shown in FIG.13, for  
30 example, when an identification #m is obtained, the  
starting address adr0 of the first stored application  
APL0 is searched for. Then, size information S0, which  
indicates the size of the application APL0 and is  
stored at the starting address adr0 of the application  
35 APL0, is obtained. Then, as an initial value, the  
identification number #0 is obtained.

Then, the starting address adr1 of the

1 application APL1 which is stored next to the  
application APL0 is searched for as a result of  
subtracting the size indicated by the size information  
S0 from the starting address adr0 of the application  
5 APL0. Then, size information S1, which indicates the  
size of the application APL1 and is stored at the  
starting address adr1 of the application APL1, is  
obtained. Then, the identification number #1 is  
obtained as a result of '1' being added to the  
10 previously obtained identification number #0.

The above-mentioned operations are repeated  
until the identification number #m is obtained.

End information is stored at the last address  
of the last application APLn so that the starting  
15 address of a new application can be easily set when the  
new application is stored in the program area 15.

In the above-described third embodiment,  
because the application management table 21 is not  
needed, it is possible to effectively use the storage  
20 capacity of the EEPROM.

In each of the first, second and third  
embodiments, the applications are stored from the  
higher address to the lower address as described above.  
However, the relationship between the management area  
25 13, data area 14 and program area 15 and the  
relationship between the addresses are relative.  
Accordingly, it is not necessary to be limited to the  
above-mentioned form.

Further, the case where the contact-type IC  
30 card is used has been described in the descriptions of  
the embodiments. However, each of these embodiments  
can be applied in the case where the non-contact-type  
IC card is used instead of the contact-type IC card.

Further, the present invention is not limited  
35 to the above-described embodiments, and variations and  
modifications may be made without departing from the  
scope of the present invention.

1           The contents of the basic Japanese Patent  
Application No.10-011689, filed on January 23, 1998,  
are hereby incorporated by reference.

5

10

15

20

25

30

35

1     WHAT IS CLAIMED IS

5

1. An application managing method for a case where a plurality of applications are stored, comprising the steps of:

forming a directory structure corresponding  
10 to said plurality of applications;  
giving items of identification information to predetermined directories of said directory structure, respectively, said items of identification information being used for identifying said plurality of  
15 applications, respectively, said plurality of applications corresponding to said predetermined directories, respectively; and

performing management so that an application of said plurality of applications corresponding to a  
20 directory of said predetermined directories is selected in accordance with an item of said items of identification information given to said directory of said predetermined directories, when said directory of said predetermined directories is selected.

25

2. The application managing method,  
30 according to claim 1, wherein:

said items of identification information comprise addresses of said plurality of applications, respectively; and

an address of said addresses is recognized,  
35 and thereby, an application of said plurality of applications corresponding to said address of said addresses is accessed.

1           3. The application managing method,  
according to claim 1, comprising the steps of:  
          preparing an application management table  
          storing said items of identification information and  
5       starting addresses of said plurality of applications  
which correspond to said items of identification  
information, respectively; and  
          referring to said application management  
table when a directory of said predetermined  
10       directories is selected, so as to recognize a starting  
address of an application of said plurality of  
applications, said starting address corresponding to an  
item of said identification information given to said  
directory of said predetermined directories, and to  
15       access said application of said plurality of  
applications.

20           4. The application managing method,  
according to claim 1, comprising the steps of:  
          storing size information at a starting  
address of each application of said plurality of  
25       applications, said size information indicating a size  
of said application of said plurality of applications;  
          repeating detection of the size of an  
application of said plurality of applications from the  
size information stored in the starting address of said  
30       application of said plurality of applications, and  
search for a starting address of a next application of  
said plurality of applications in accordance with said  
size of the preceding application of said plurality of  
applications, so as to obtain the starting address of a  
35       desired application of said plurality of applications.

1           5. The application managing method,  
according to claim 1, wherein an item of said items of  
identification information is given to the highest  
directory of said directory structure.

5

6. The application managing method,  
10 according to claim 1, wherein an item of said items of  
identification information is given to each directory  
of said directory structure.

15

7. The application managing method,  
according to claim 1, wherein, when an application of  
said plurality of applications is substantially  
20 deleted, an item of said items of identification  
information for said application of said plurality of  
applications is caused to be ineffective.

25

8. The application managing method,  
according to claim 1, wherein:  
when an application of said plurality of  
30 applications is updated, an application obtained from  
updating said application of said plurality of  
applications is added to said plurality of  
applications; and  
an item of said items of identification  
35 information for identifying said application of said  
plurality of applications is changed to an item of  
identification information for identifying said



1 application obtained from updating said application of  
said plurality of applications.

5

9. An application managing method,  
comprising the steps of:

10 storing applications and data used by said  
applications in a series of storage areas; and  
managing the applications and data used by  
said applications stored in said series of storage  
areas,

15 wherein said series of storage areas is  
divided into a program area storing said applications  
and a data area storing said data used by said  
applications.

20

10. The application managing method,  
according to claim 9, wherein a boundary between said  
program area and said data area is changeable.

25

11. The application managing method,  
30 according to claim 10, wherein, when said applications  
are stored in said program area, said applications are  
stored from an end of said program area opposite to  
said boundary.

35

1           12. An information processing apparatus,  
storing a plurality of applications, comprising a  
directory structure corresponding to said plurality of  
applications,

5           wherein items of identification information  
are given to predetermined directories of said  
directory structure, respectively, said items of  
identification information being used for identifying  
said plurality of applications, respectively, said  
10          plurality of applications corresponding to said  
predetermined directories of said directory structure.

15           13. The information processing apparatus,  
according to claim 12, wherein said items of  
identification information comprise addresses of said  
plurality of applications, respectively.

20           14. The information processing apparatus  
25          according to claim 12, comprising an application  
management table which stores said items of  
identification information and starting addresses of  
said plurality of applications which correspond to said  
items of identification information, respectively.

30           15. The information processing apparatus,  
35          according to claim 12, wherein an item of said items of  
identification information is given to the highest  
directory of said directory structure.

1           16. The information processing apparatus,  
according to claim 12, wherein an item of said items of  
identification information is given to each directory  
of said directory structure.

5

10           17. An information processing apparatus,  
storing applications and data used by said applications  
in a series of storage areas,

              wherein said series of storage areas is  
divided into two predetermined areas, one of said two  
predetermined areas storing the applications and the  
15   other of said two predetermined areas storing the data  
used by said applications.

20

25

30

35

1     ABSTRACT OF THE DISCLOSURE

          A directory structure corresponding to a  
plurality of applications is formed. Items of  
identification information are given to predetermined  
5     directories of the directory structure, respectively,  
the items of identification information being used for  
identifying the plurality of applications,  
respectively, the plurality of applications  
corresponding to the predetermined directories,  
10    respectively. Management is performed so that an  
application of the plurality of applications  
corresponding to a directory of the predetermined  
directories is selected in accordance with an item of  
the items of identification information given to the  
15    directory of the predetermined directories, when the  
directory of the predetermined directories is selected.

20

25

30

35

FIG. 1

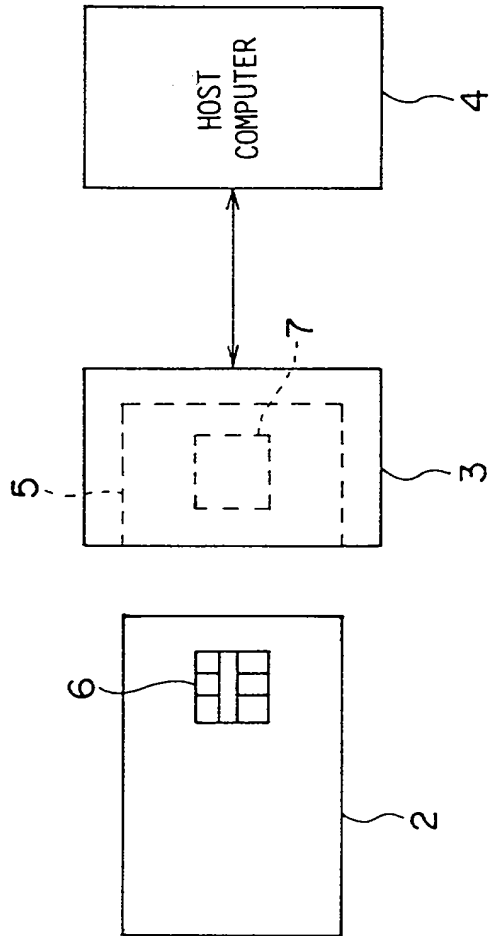


FIG. 2

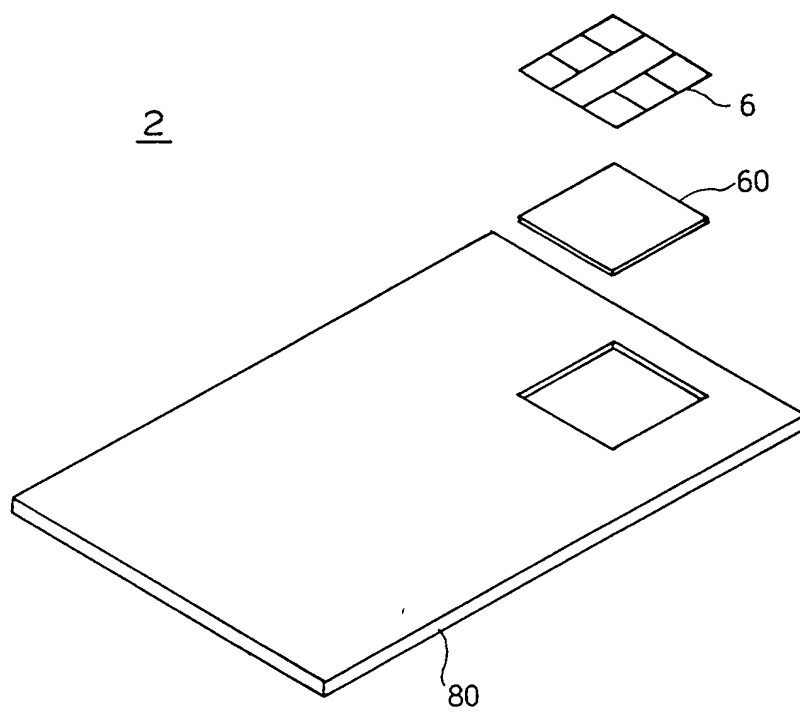


FIG. 3

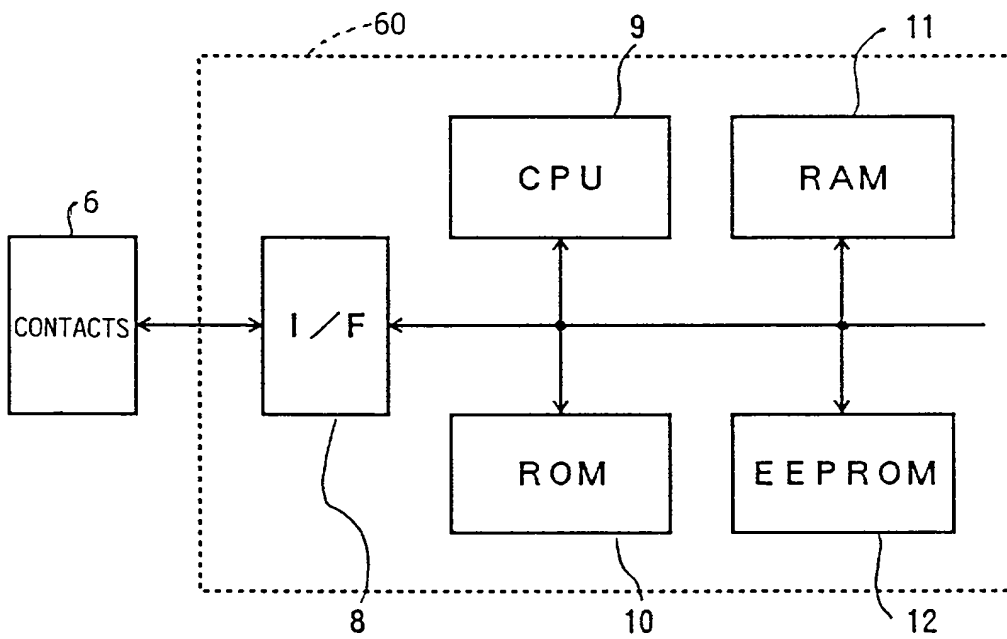


FIG. 4

1 2


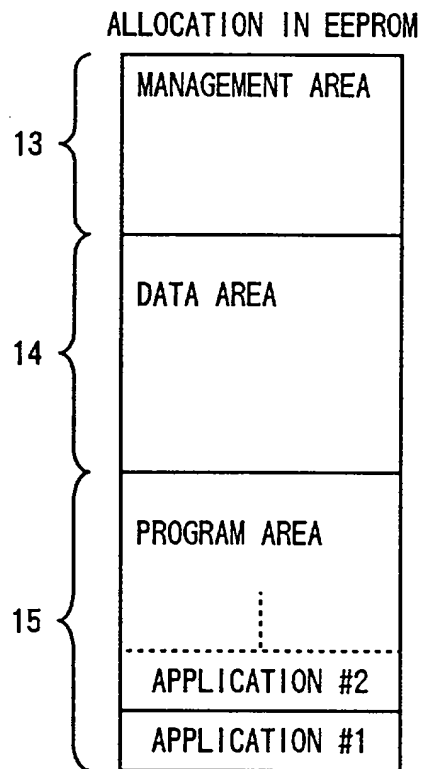




FIG. 5

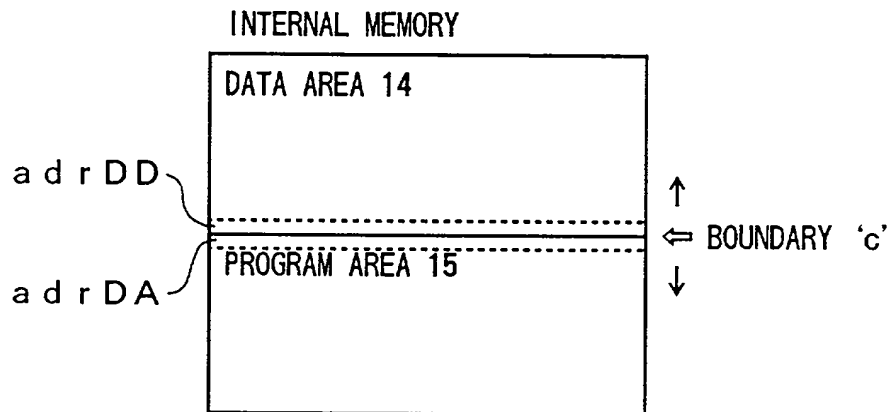

# FIG. 6

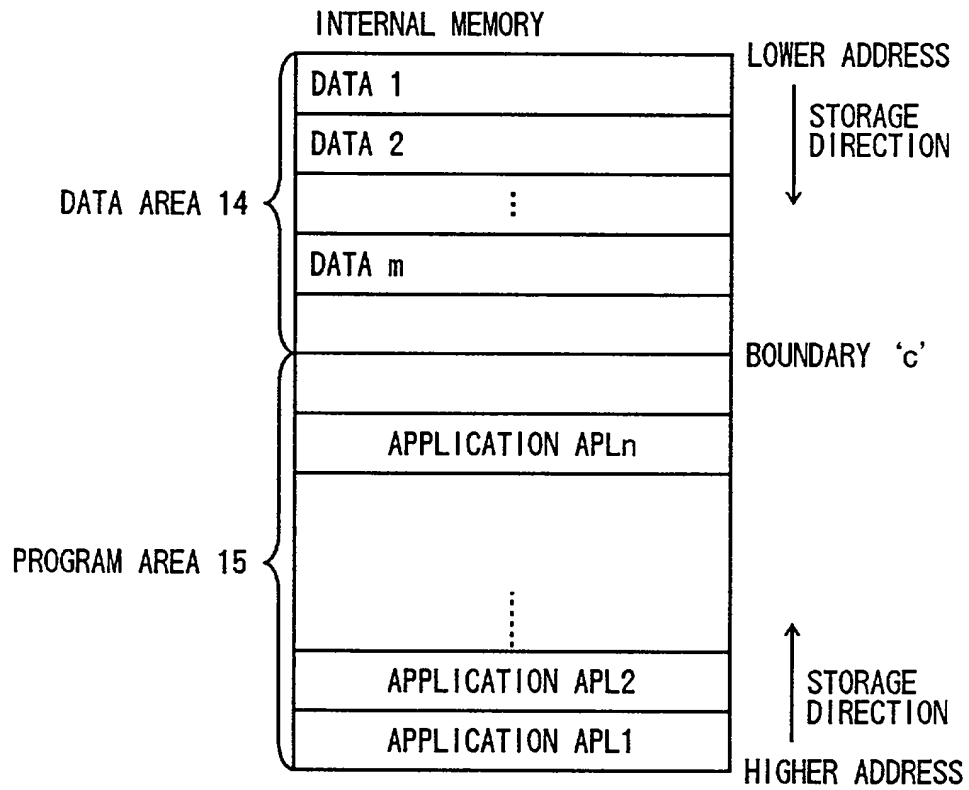


FIG. 7

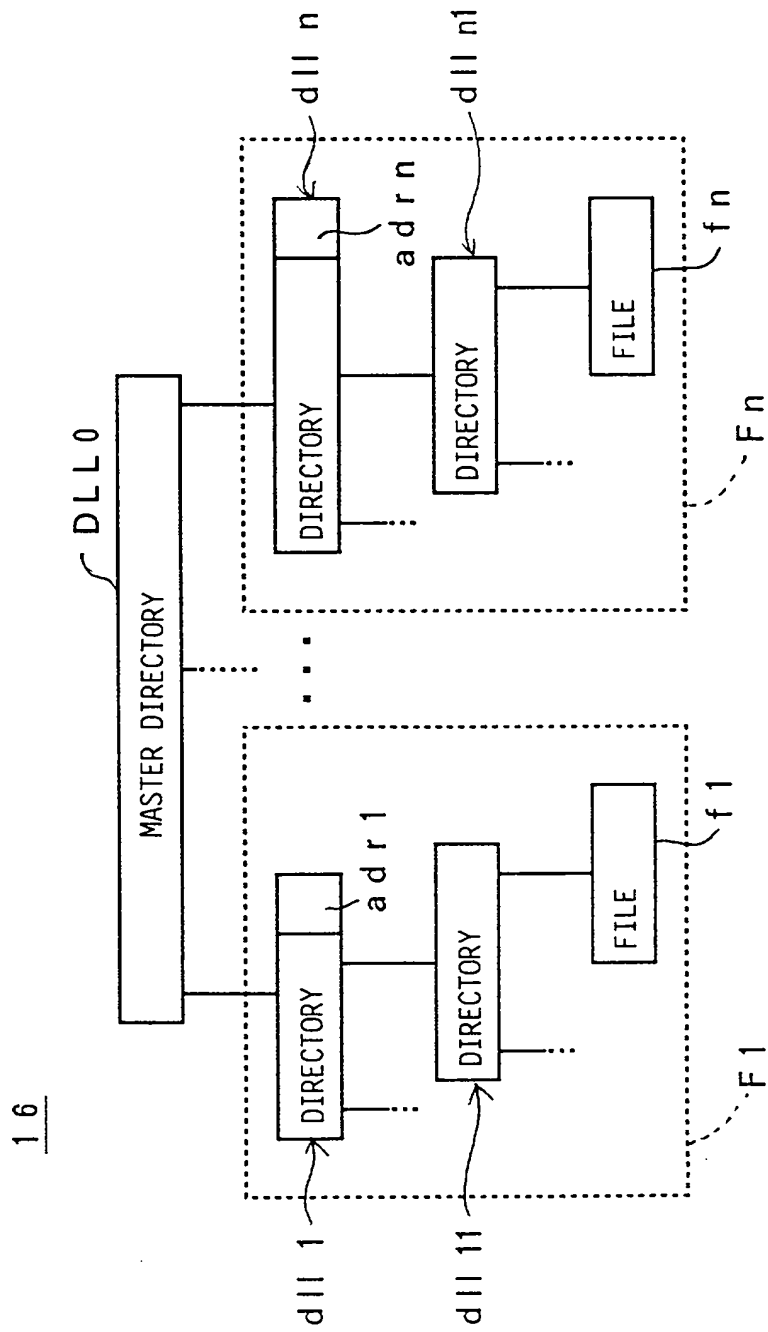


FIG. 8

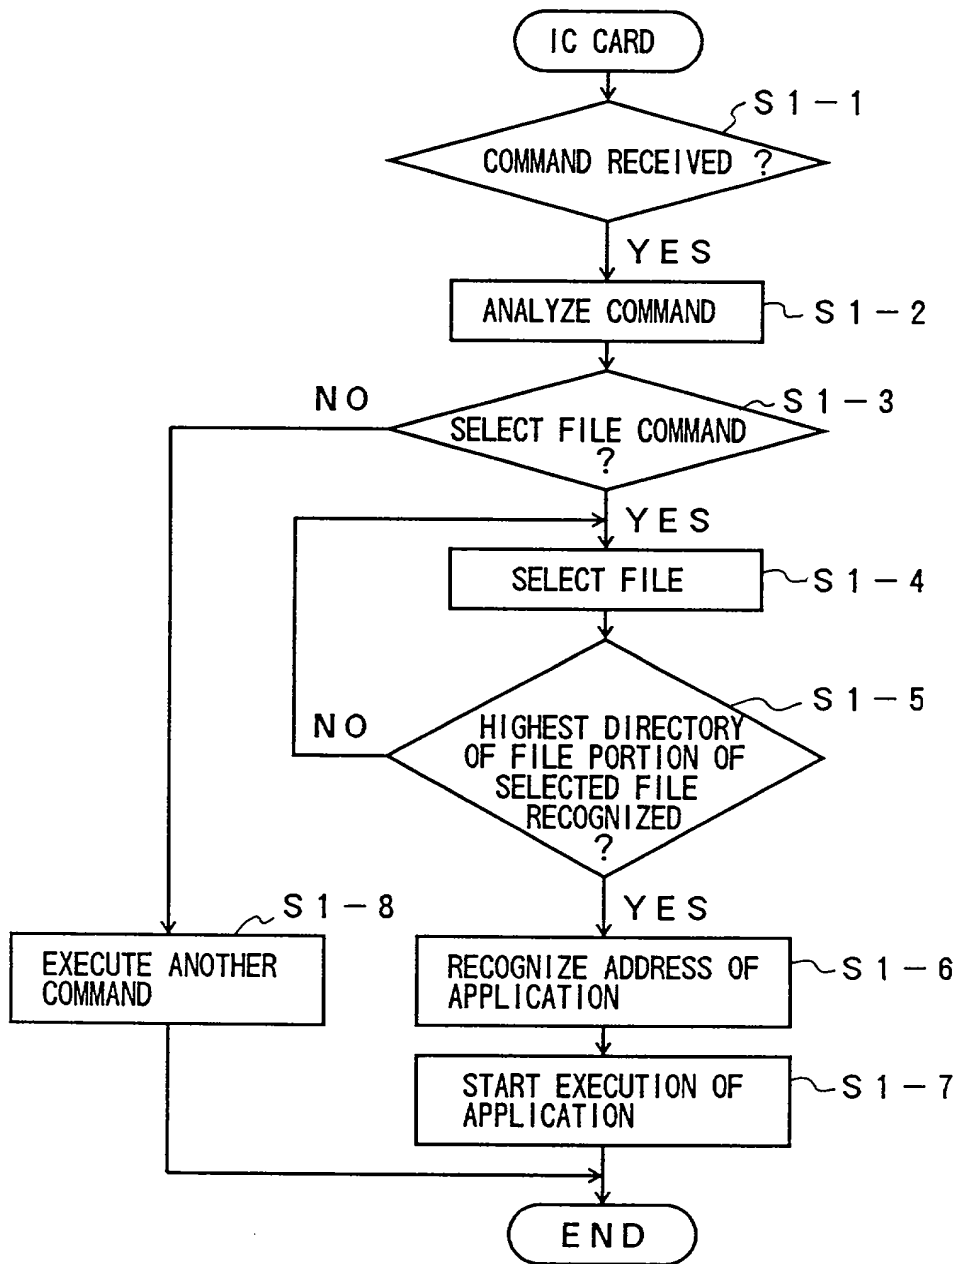


FIG. 9



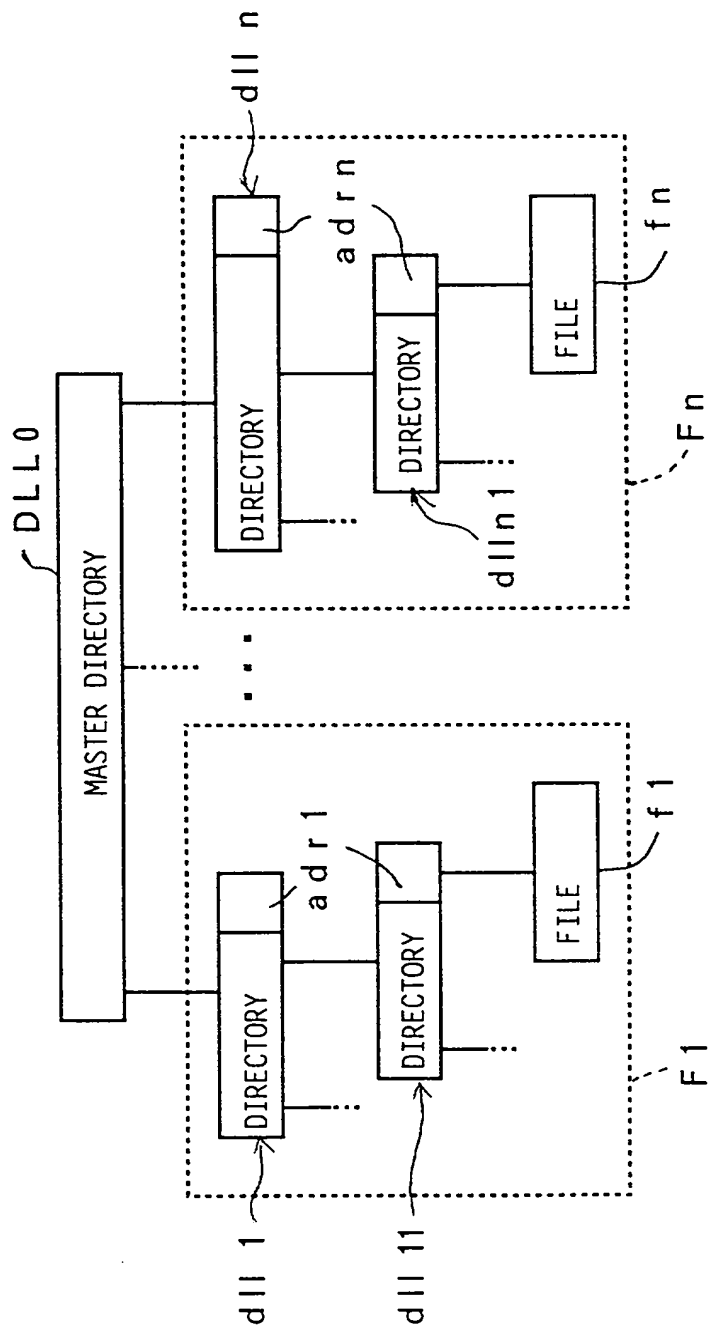


FIG. 10

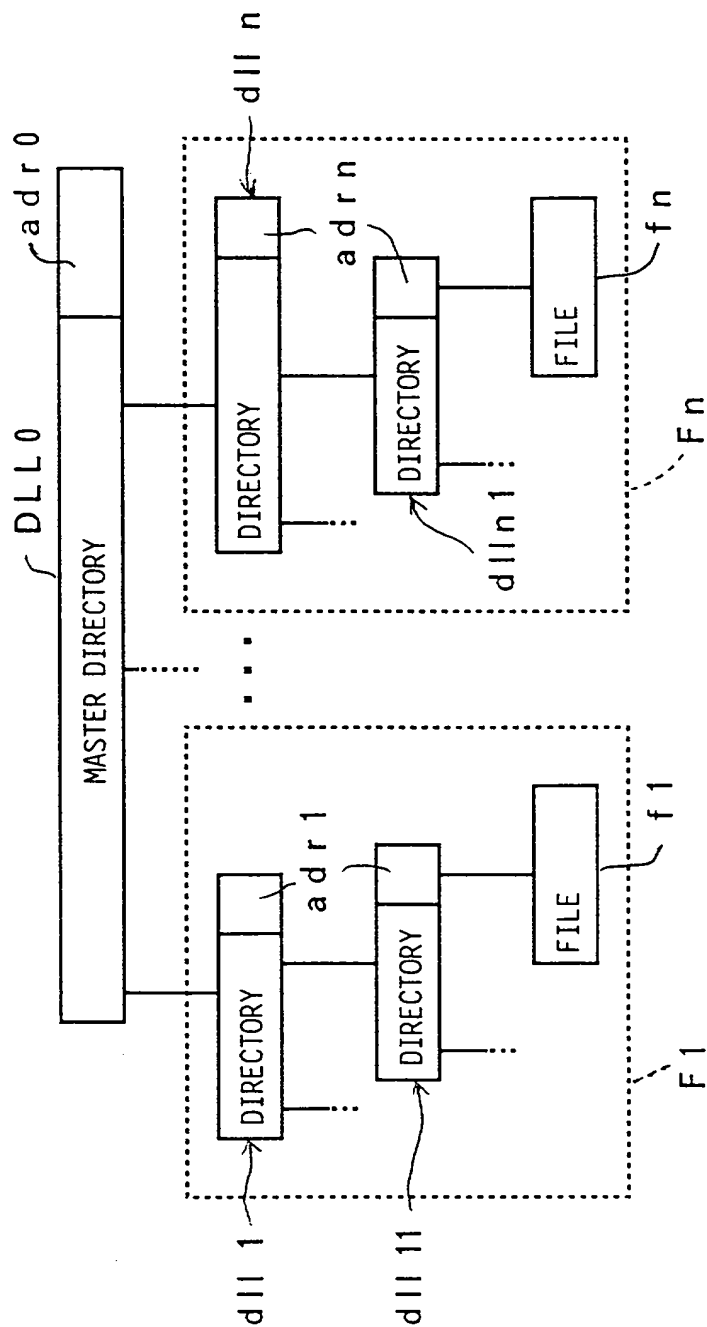

# FIG. 11

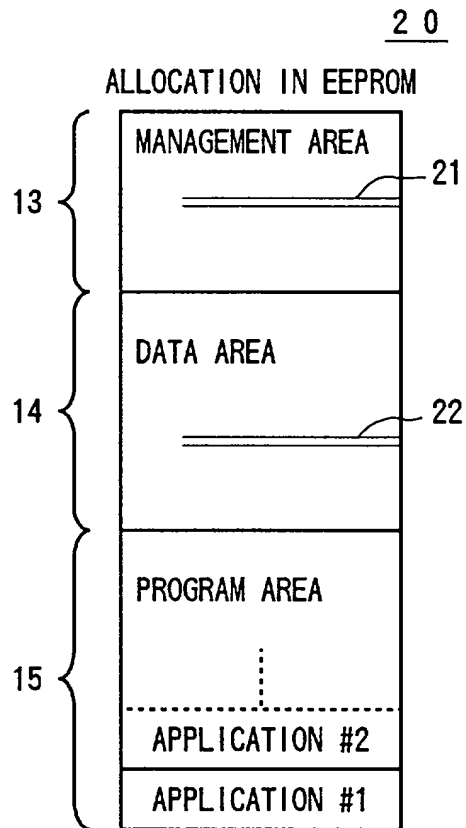

# FIG. 12

21

APPLICATION MANAGEMENT TABLE

NUMBER	APPLICATION ADDRESS
# 0	a d r 0
...	...
# n	a d r n



FIG. 13


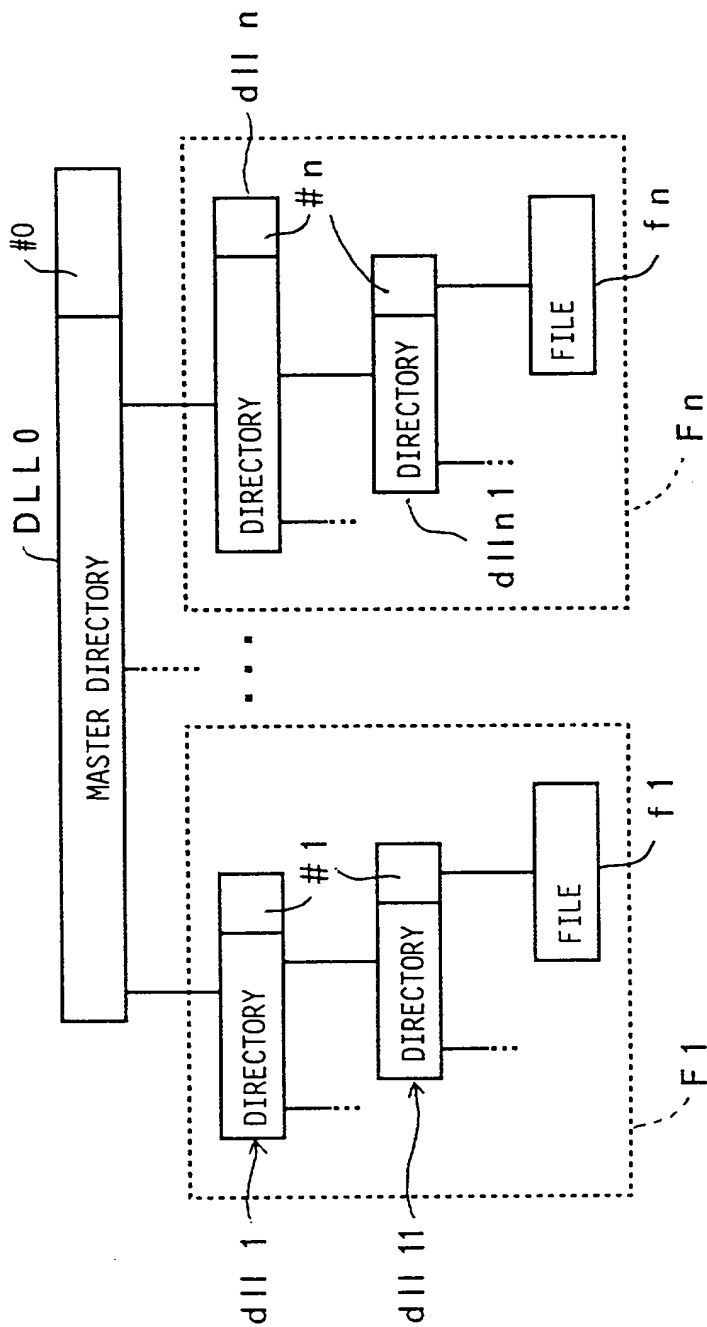


FIG. 14

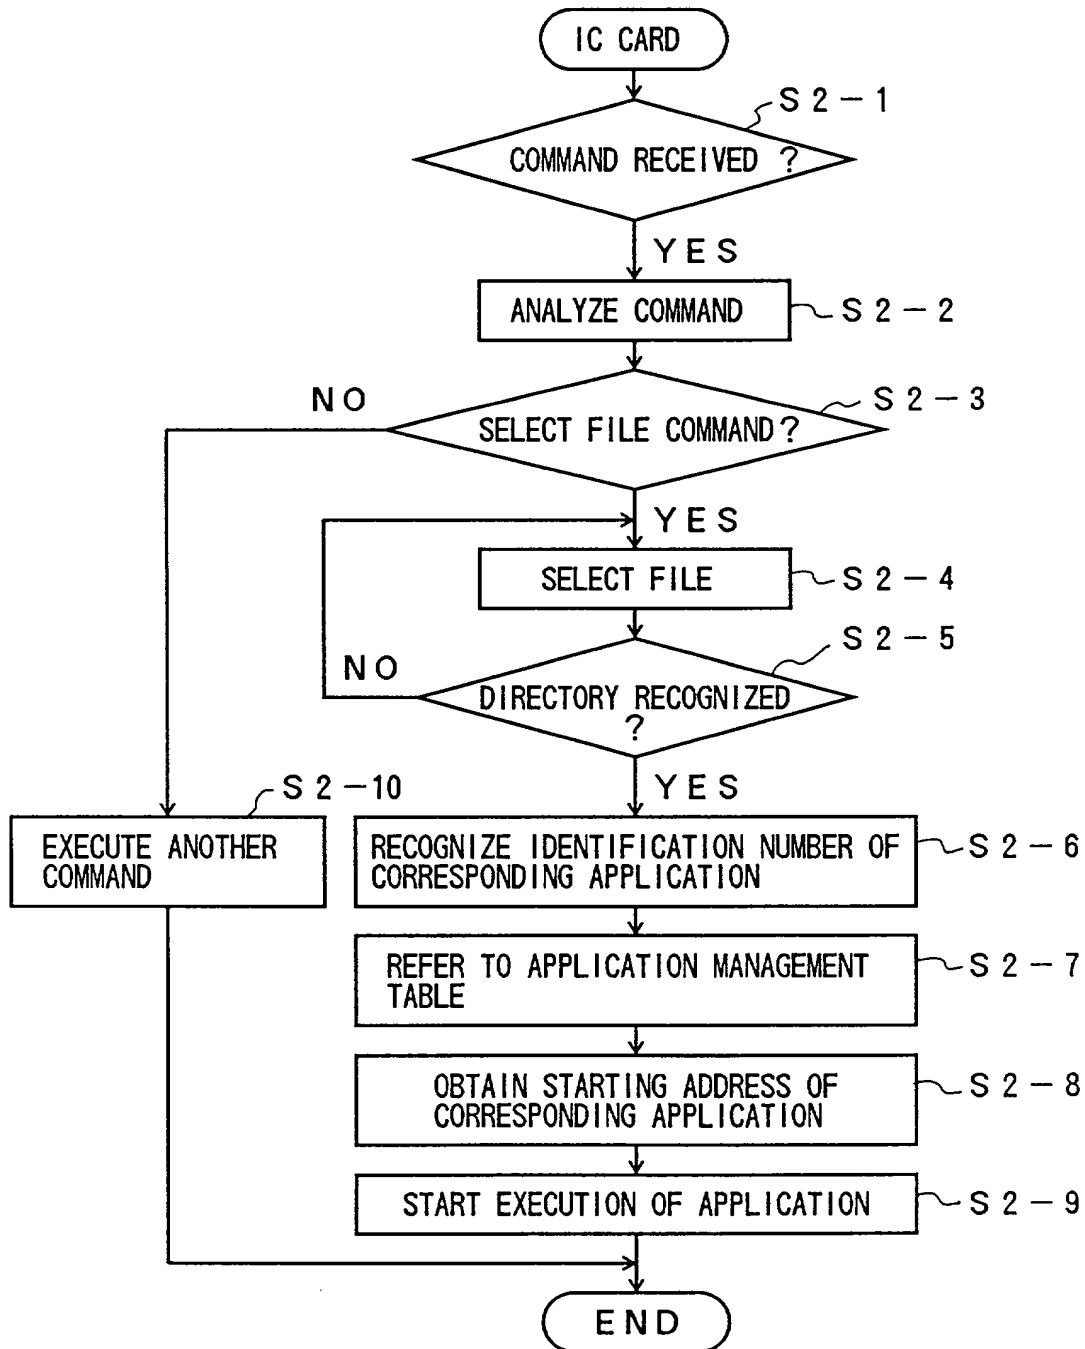

# FIG. 15

## APPLICATION MANAGEMENT TABLE 21

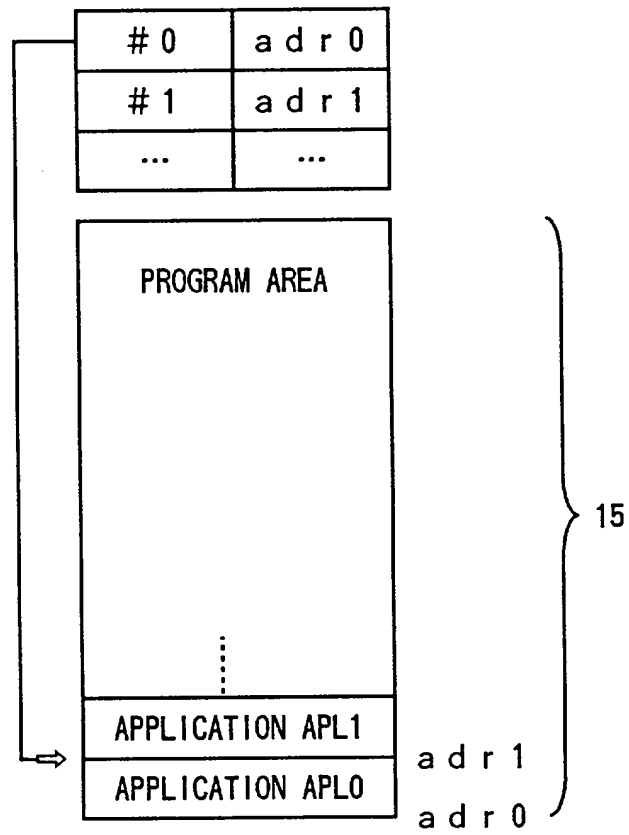


FIG. 16

APPLICATION MANAGEMENT TABLE 21

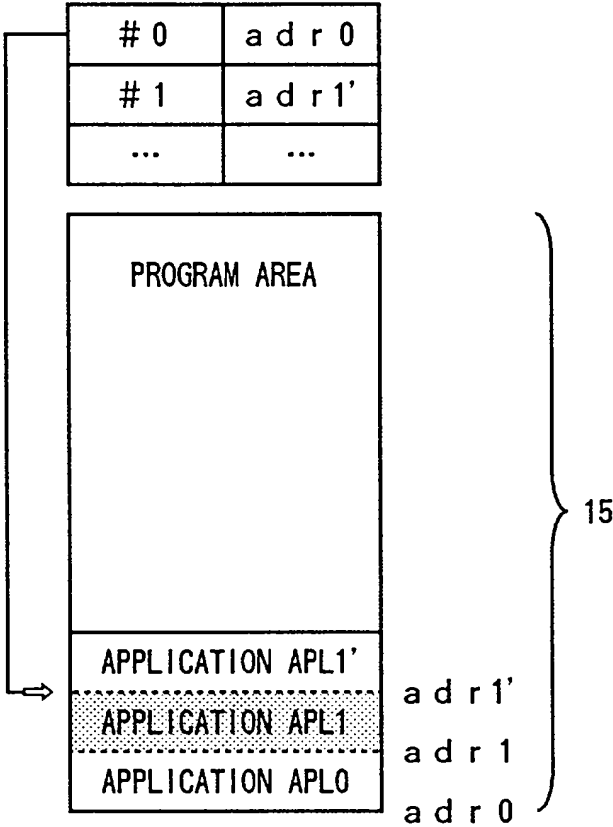


FIG. 17


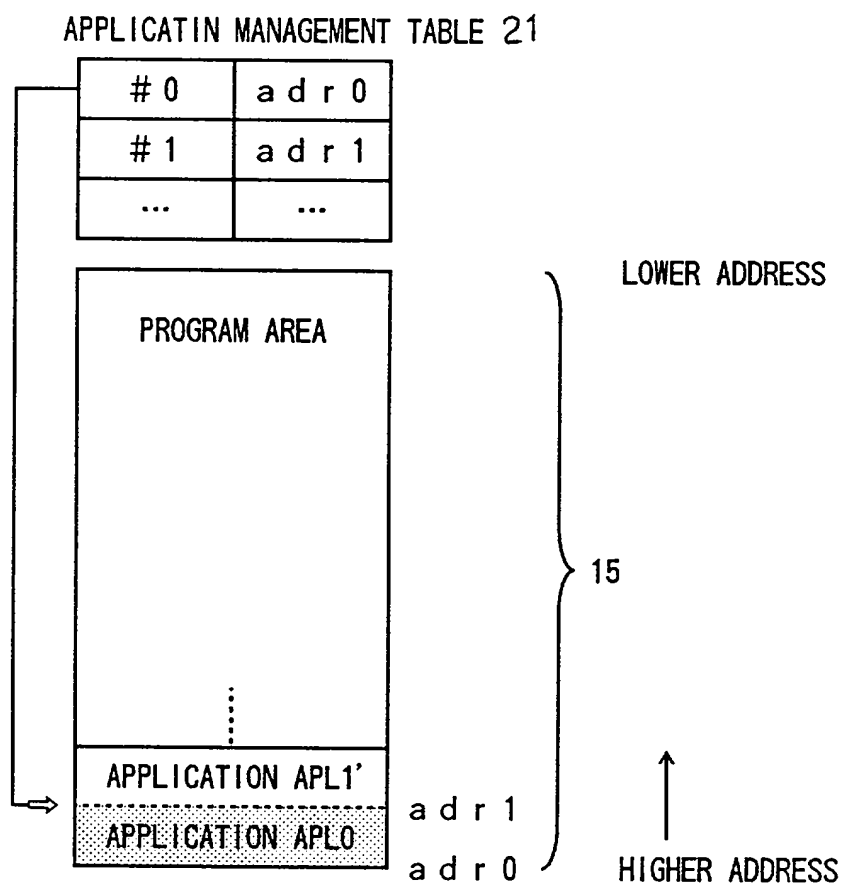


FIG. 18

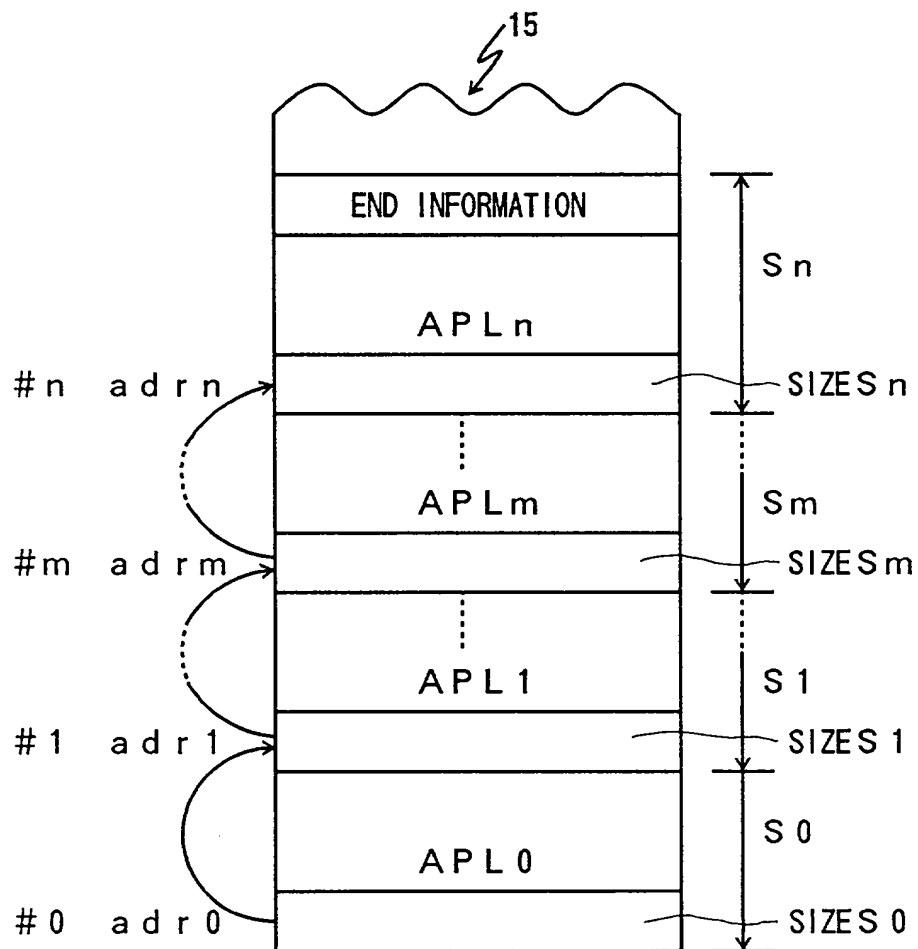

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、郵便箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### APPLICATION MANAGING METHOD AND

### INFORMATION PROCESSING APPARATUS

### USING THE METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、送附規則第37編第1条56項に定義されるとあり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s) (Patent Application)

外国での先行出願  
No.10-011689

Japan

23/January/1998

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

Priority Not Claimed  
優先権主張なし

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米  
国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code,  
Section 119(e) of any United States provisional application(s) listed  
below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米  
国特許出願に記載された権利、又は米国を指定している特許  
協力条約365条(c)に基づき権利をここに主張します。また、  
本出願の各請求範囲の内容が米国法典第35編112条  
第1項又は特許協力条約で規定された方法で先行する米国特  
許出願に開示されていない限り、その先行米国出願書提出日  
以降で本出願書の日本国内または特許協力条約国際提出日ま  
での期間中に入手された、連邦規則法典第37編1条56項  
で定義された特許資格の有無に関する重要な情報について開  
示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code,  
Section 120 of any United States application(s), or 365(c) of any  
PCT International application designating the United States, listed  
below and, insofar as the subject matter of each of the claims of  
this application is not disclosed in the prior United States or PCT  
International application in the manner provided by the first  
paragraph of Title 35, United States Code Section 112, I  
acknowledge the duty to disclose information which is material to  
patentability as defined in Title 37, Code of Federal Regulations,  
Section 1.55 which became available between the filing date of the  
prior application and the national or PCT International filing date of  
application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表  
明が真実であり、かつ私の入手した情報と私の信じていること  
に基づき説明が全て真実であると信じていること、さらに故意  
になされた虚偽の説明及びそれと同等の行為は米国法典第  
18編第1001条に基づき、罰金または拘禁、もしくはその  
両方により処罰されること、そしてそのような故意による  
虚偽の説明を行えば、出願した、又は既に許可された特許  
の有効性が失われることを認識し、よってここに上記のごと  
く宣誓を致します。

I hereby declare that all statements made herein of my own  
knowledge are true and that all statements made on information  
and belief are believed to be true; and further that these  
statements were made with the knowledge that willful false  
statements and the like so made are punishable by fine or  
imprisonment, or both, under Section 1001 of Title 18 of the  
United States Code and that such willful false statements may  
jeopardize the validity of the application or any patent issued  
thereon.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration  
(日本語宣言書)

委任状 私は下記の発明者として、本出願に関する一切の  
手続を 貴特許審判局に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁護士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,  
30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.  
Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756;  
George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

## 書類送付先

H.J. Staas  
Staas & Halsey  
700 Eleventh Street, N.W. Suite 500.  
Washington, DC 20001

## Send Correspondence to:

H. J. Staas  
Staas & Halsey  
700 Eleventh Street, N.W. Suite 500  
Washington, DC 20001

## 直接電話連絡先: (名前及び電話番号)

Telephone: 202-434-1500  
Facsimile: 202-434-1501

## Direct Telephone Calls to: (name and telephone number)

Telephone: 202-434-1500  
Facsimile: 202-434-1501

第一または第一発明者名	Full name of sole or first inventor		
	Kazuhiro Tomizawa		
発明者の署名	日付	Inventor's signature	Date
		Kazuhiro Tomizawa	June 19, 1998
住所	Residence		
	Maebashi, Gunma, Japan		
国籍	Citizenship		
	Japan		
郵便先	Post Office Address		
	c/o FUJITSU TERMINAL SYSTEMS LIMITED, 8-3, Tonyamachi 1-chome, Maebashi, Gunma, 371-0855 Japan		
第二共同発明者	Full name of second joint inventor, if any		
第二共同発明者	日付	Second inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便先	Post Office Address		

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)